

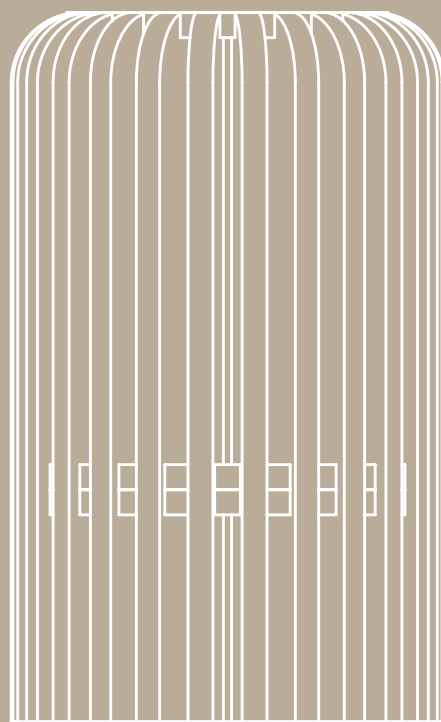


LEGERRO

ACCU

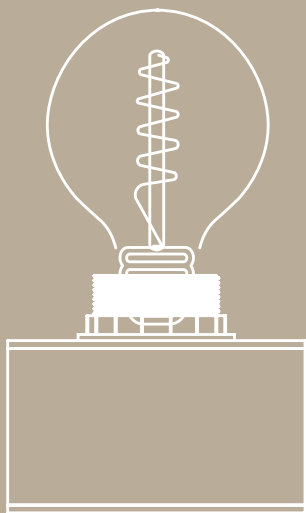

Mini USB loading cable

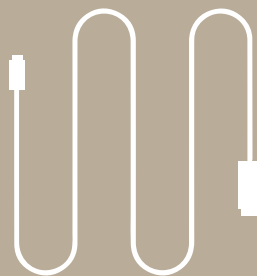

DESIGNS TRACKER

© 2023 Designstracker. All rights reserved



TECHNICAL SPECIFICATIONS LEGERRO ACCU

E27

IP20

AC

12V



Loading Voltage:	AC120-230V
LED Power LEGERRO ACCU:	4W (620lm)
Battery capacity:	7800 mAh
Working time:	9/16/30 hrs
Efficiency(lm/w):	160lm/w
LED Type:	G60 Globe
Dimmable:	YES (3-step DIM)
Working time 100%	9 hrs
Working time 60%	16 hrs
Working time 30%	30 hrs
Color Rendering Index(CRI):	90 Ra
Dimensions LEGERRO:	Ø16x25cm

2700K

TECHNICAL SPECIFICATIONS PETBOARD

Composition:	100% PET (> 70% recycled PET)
Thickness:	9mm
Density:	210kg/m ³
Weight:	1900g/m ² (± 2%)
Number of PET-bottles:	55/m ²
PETpanel colors:	33
Fire test EN 13501-1:	B-S1, d0
Sound-absorbing surface LEGERRO:	0,16m ² (± 5%)
Sound absorption petboard aw/m ² :	0,25
Sound absorption petboard NRC/m ² :	0,30



DESIGNS TRACKER

© 2023 Designstracker. All rights reserved