



LEGERRO



G60, GLOBE

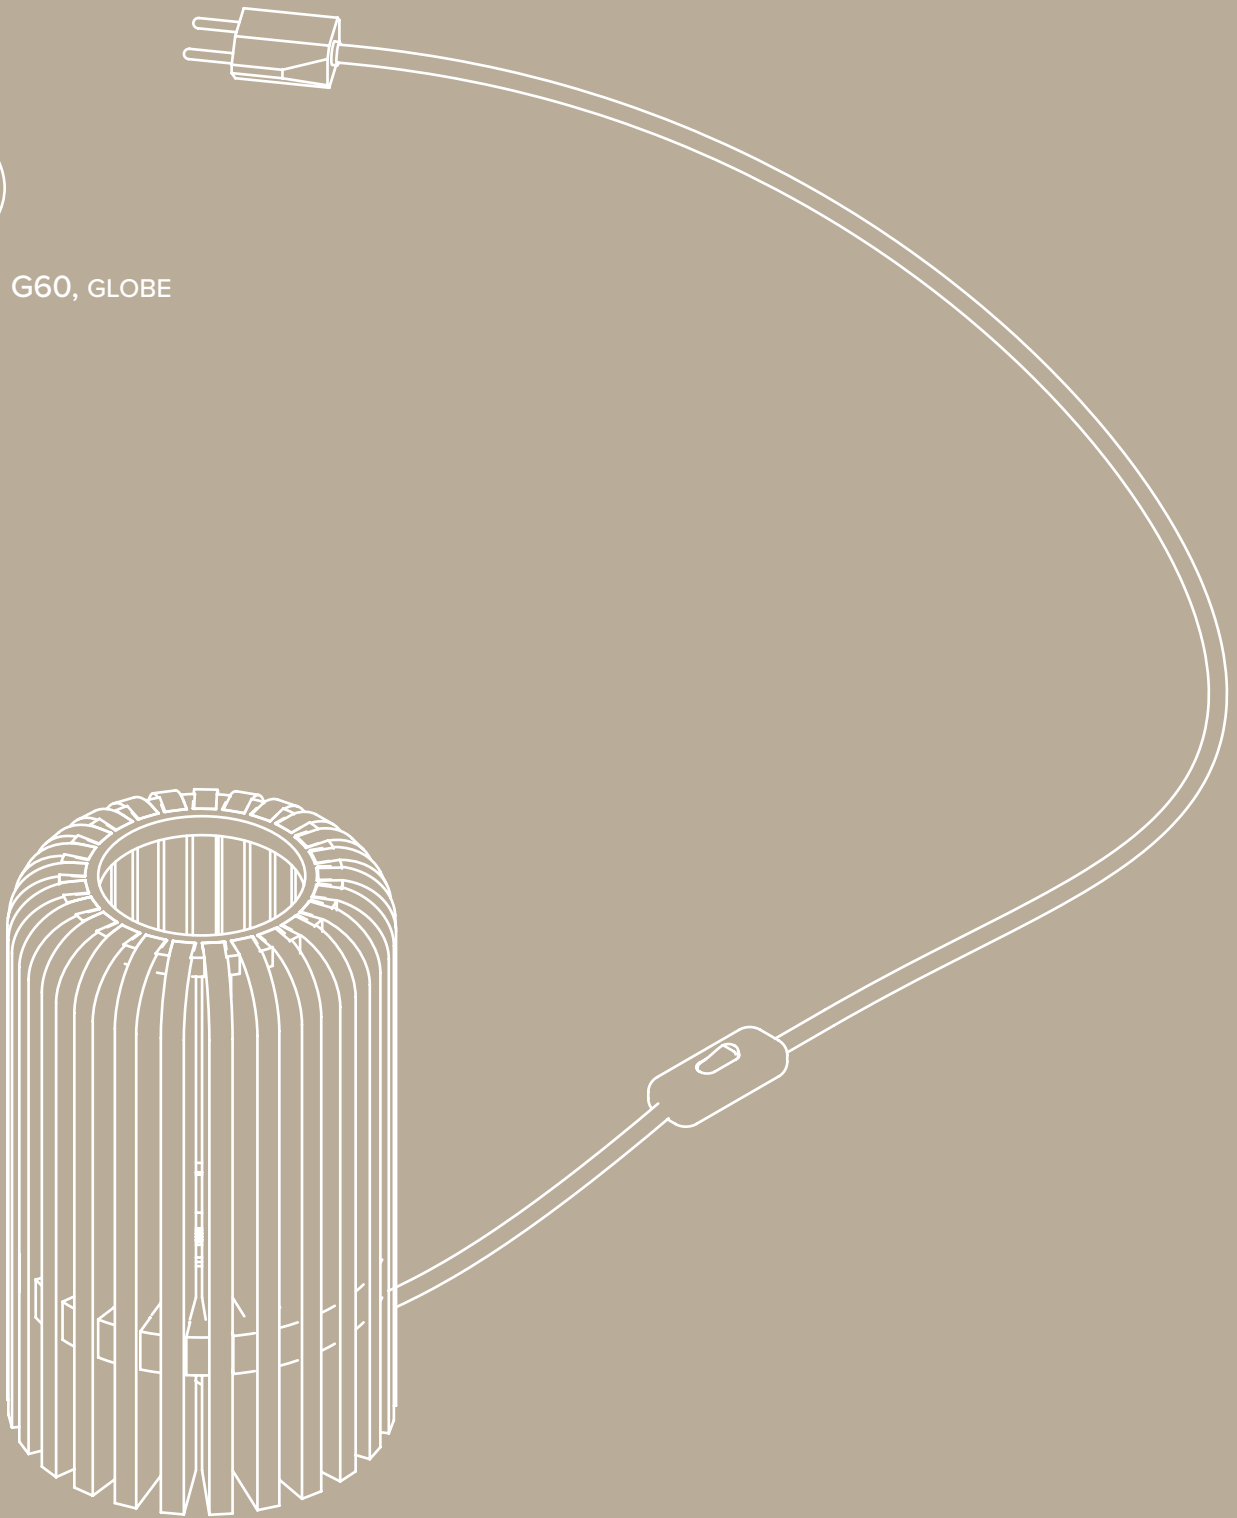

DESIGNS TRACKER[®]

© 2023 Designstracker. All rights reserved



TECHNICAL SPECIFICATIONS **LEGERRO**

E27

IP20

AC

230V

120°

Input Voltage: AC120-230V

LED Power LEGERRO: 3W (470lm)

Efficiency(lm/w): 160lm/w

LED Type: G60 Globe

Dimmable: NO

Color Rendering Index(CRI): 90 Ra

Dimensions LEGERRO: Ø16x25cm

Cable length: 200cm



Light bulb dimmable
(dimmable switch contact for more info:)

2200K

TECHNICAL SPECIFICATIONS **PETBOARD**

Composition: 100% PET (> 70% recycled PET)

Thickness: 9mm

Density: 210kg/m³

Weight: 1900g/m² (± 2%)

Number of PET-bottles: 55/m²

PETpanel colors: 33

Fire test EN 13501-1: B-S1, d0 (B: nearly non-combustible S1: low smoke production d0: no droplet formation during fire)

Sound-absorbing surface LEGERRO: 0,16m² (± 5%)

Sound absorption petboard aw/m²: 0,25

Sound absorption petboard NRC/m²: 0,30





DESIGNS TRACKER[®]
LEGERRO-22/65-G-W



DESIGNS TRACKER®
LEGERRO-48-G-W