



LUX STELLA



G125 GLOBE

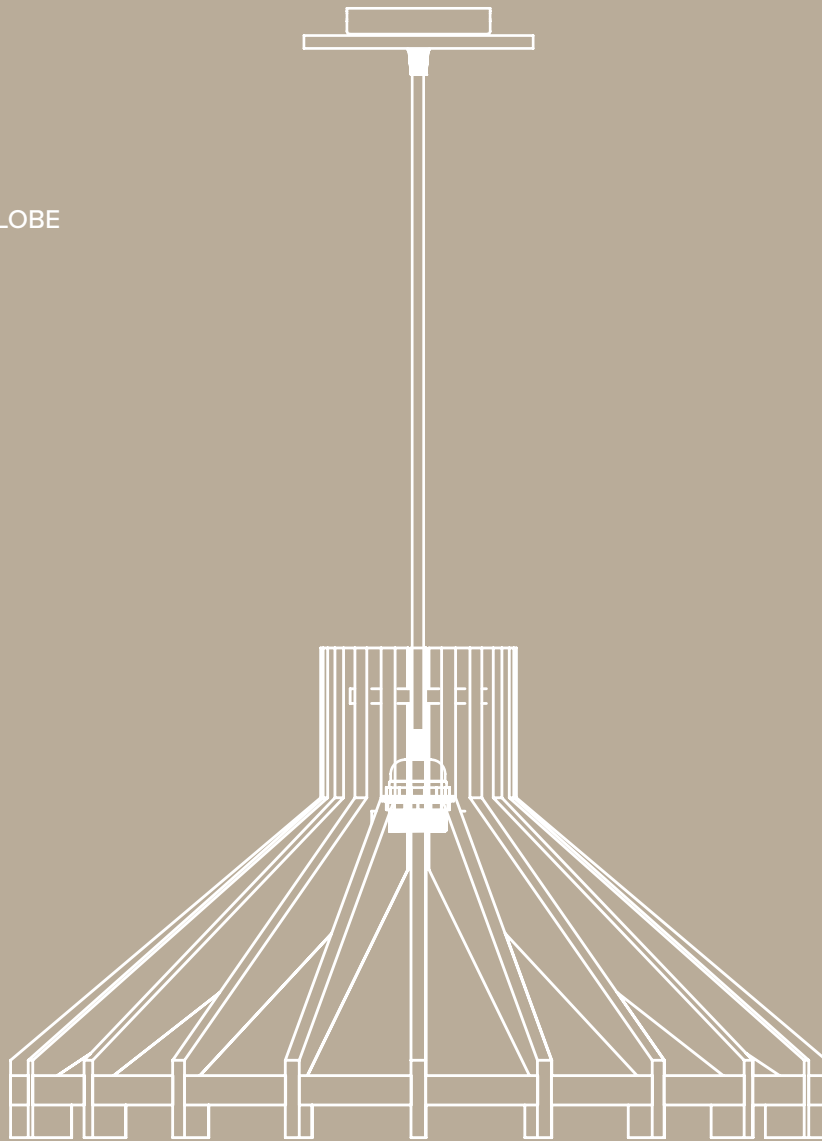

TECHNICAL SPECIFICATIONS LUX STELLA

E27

IP20

AC

230V



Input Voltage:	AC120-230V
LED Power LUX STELLA:	4W (400lm)
Efficiency(lm/w):	100lm/w
LED Type:	G125 Globe
Dimmable:	YES
Color Rendering Index(CRI):	85 Ra
Dimensions LUX STELLA:	Ø42x50cm
Cable length:	200cm

Light bulb dimmable



2200K

TECHNICAL SPECIFICATIONS PETBOARD

Composition:	100% PET (> 70% recycled PET)
Thickness:	9mm
Density:	210kg/m ³
Weight:	1900g/m ² (± 2%)
Number of PET-bottles:	55/m ²
PETpanel colors:	33
Fire test EN 13501-1:	B-S1, d0 (B: nearly non-combustible S1: low smoke production d0: no droplet formation during fire)
Sound-absorbing surface LUX STELLA:	0,57m ² (± 5%)
Sound absorption petboard aw/m ² :	0,25
Sound absorption petboard NRC/m ² :	0,30

