


# LINE

600mm 2400mm

STANDARD: LED-strip

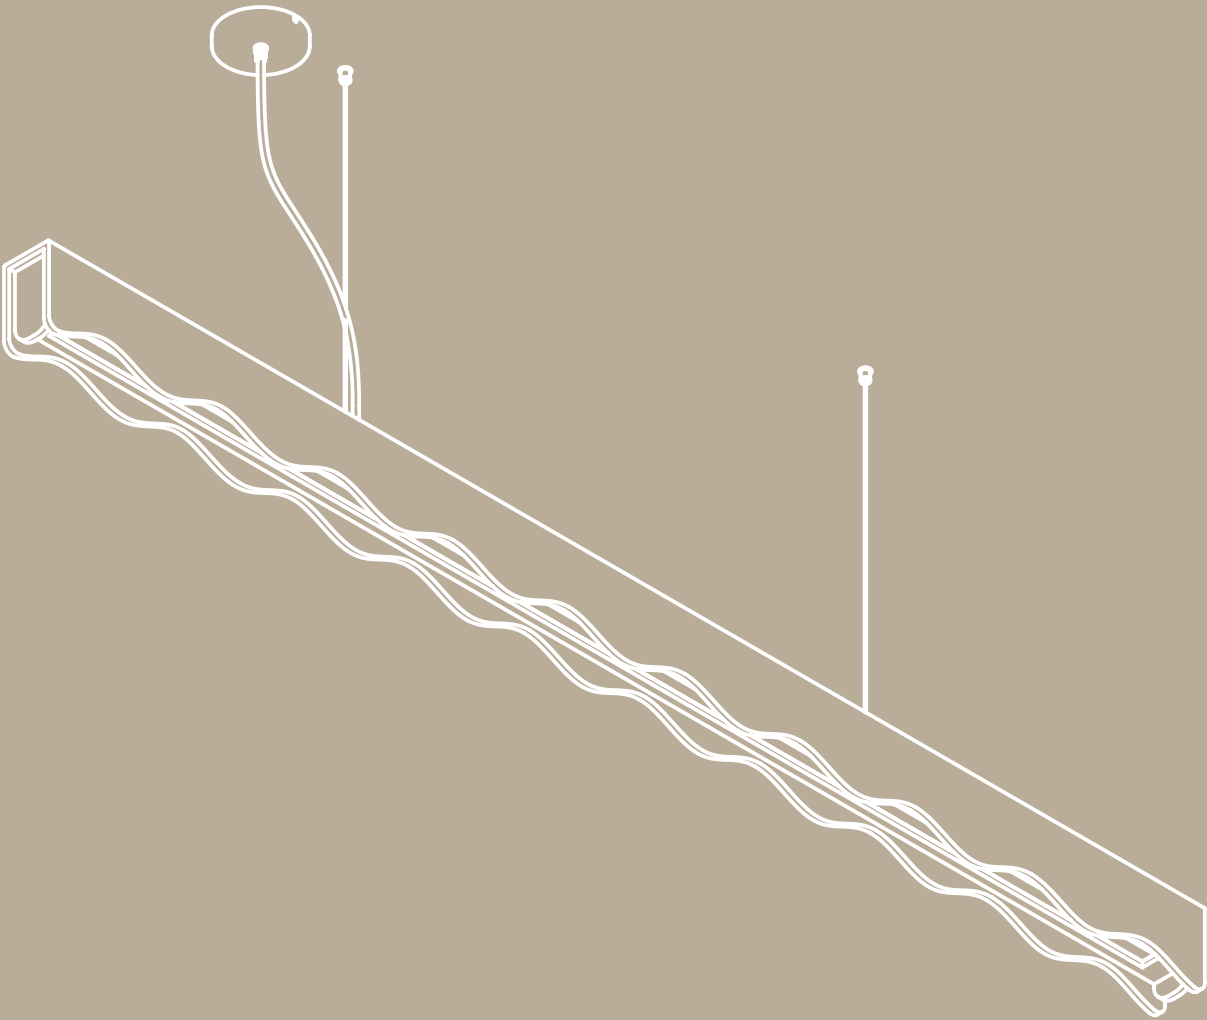

## TECHNICAL SPECIFICATIONS LINE



IP20

AC

230V




TRIAC

DALI

0-10V

|                             |                        |
|-----------------------------|------------------------|
| Input Voltage:              | AC 100V-240V (50-60Hz) |
| LED Power singel LED        | 24W/1000mm             |
| LED Power double LED        | 48W/1000mm             |
| LED Type:                   | SMD5050 (LEDstrip)     |
| Efficiency(lm/w):           | 80lm/w                 |
| Color Rendering Index(CRI): | 80 Ra                  |
| Dimensions LINE singel LED: | 60-240x7x10cm          |
| Dimensions LINE double LED: | 60-240x8x10cm          |
| Cable length:               | 200cm                  |
| Control:                    | TUYA smart app/Remote  |



STANDARD: Double LED rail 48W/1000mm Single LED rail 24W/1000mm



## TECHNICAL SPECIFICATIONS PETBOARD

|                                   |                               |
|-----------------------------------|-------------------------------|
| Composition:                      | 100% PET (> 70% recycled PET) |
| Thickness:                        | 9mm                           |
| Density:                          | 210kg/m3                      |
| Weight:                           | 1900g/m2 (± 2%)               |
| Number of PET-bottles:            | 55/m2                         |
| PETpanel colors:                  | 33                            |
| Fire test EN 13501-1:             | B-S1, d0                      |
| Sound absorption petboard aw/m2:  | 0,25                          |
| Sound absorption petboard NRC/m2: | 0,30                          |

SPECIAL: RGB+CCT

