



LIXEIRO



G85 GLOBE

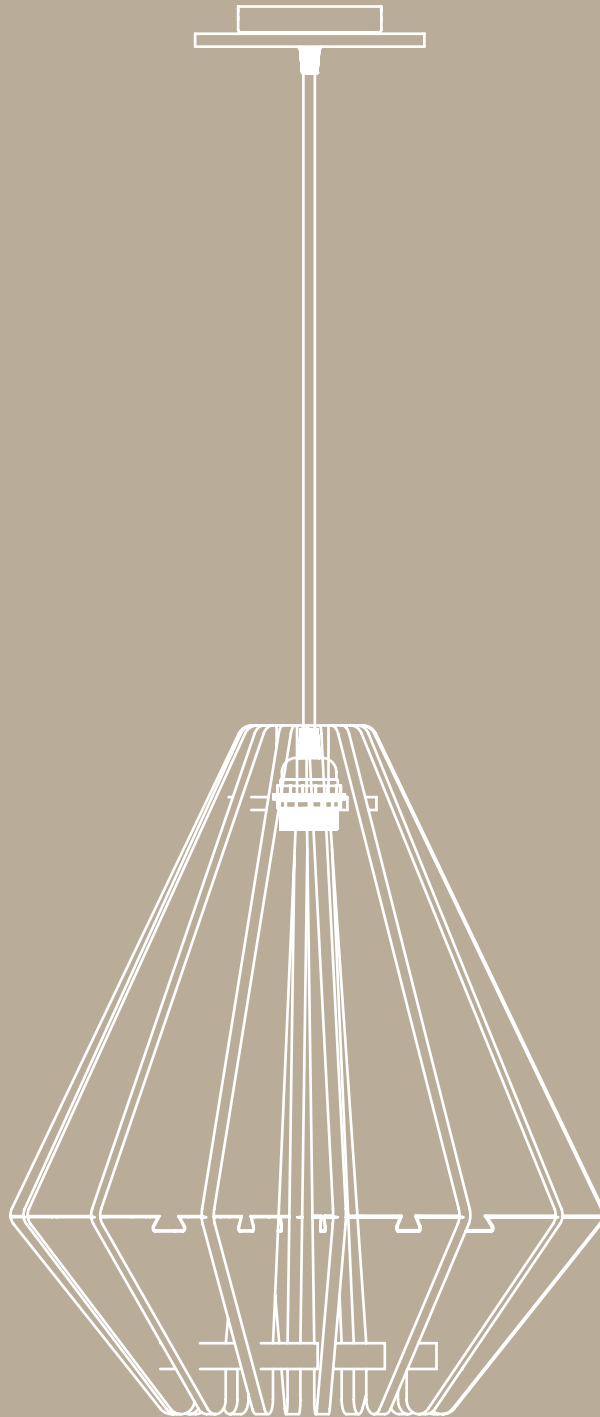

TECHNICAL SPECIFICATIONS LIXEIRO

E27

IP20

AC

230V

360°

Input Voltage: AC120-230V

LED Power LIXEIRO: 4W (400lm)

Efficiency(lm/w): 100lm/w


LED Type: G85 Globe

Dimmable: YES


Color Rendering Index(CRI): 85 Ra

Dimensions LIXEIRO: Ø42x50cm

Cable length: 200cm



LIXEIRO



LIXEIRO DIP

TECHNICAL SPECIFICATIONS PETBOARD

Composition: 100% PET (> 70% recycled PET)

Thickness: 9mm

Density: 210kg/m³

Weight: 1900g/m² (± 2%)

Number of PET-bottles: 55/m²

PETpanel colors: 33

Fire test EN 13501-1: B-S1, d0 (B: nearly non-combustible S1: low smoke production d0: no droplet formation during fire)

Sound-absorbing surface LIXEIRO: 0,57m² (± 5%)

Sound absorption petboard aw/m²: 0,25

Sound absorption petboard NRC/m²: 0,30

