


LEGERRO_{STAND}

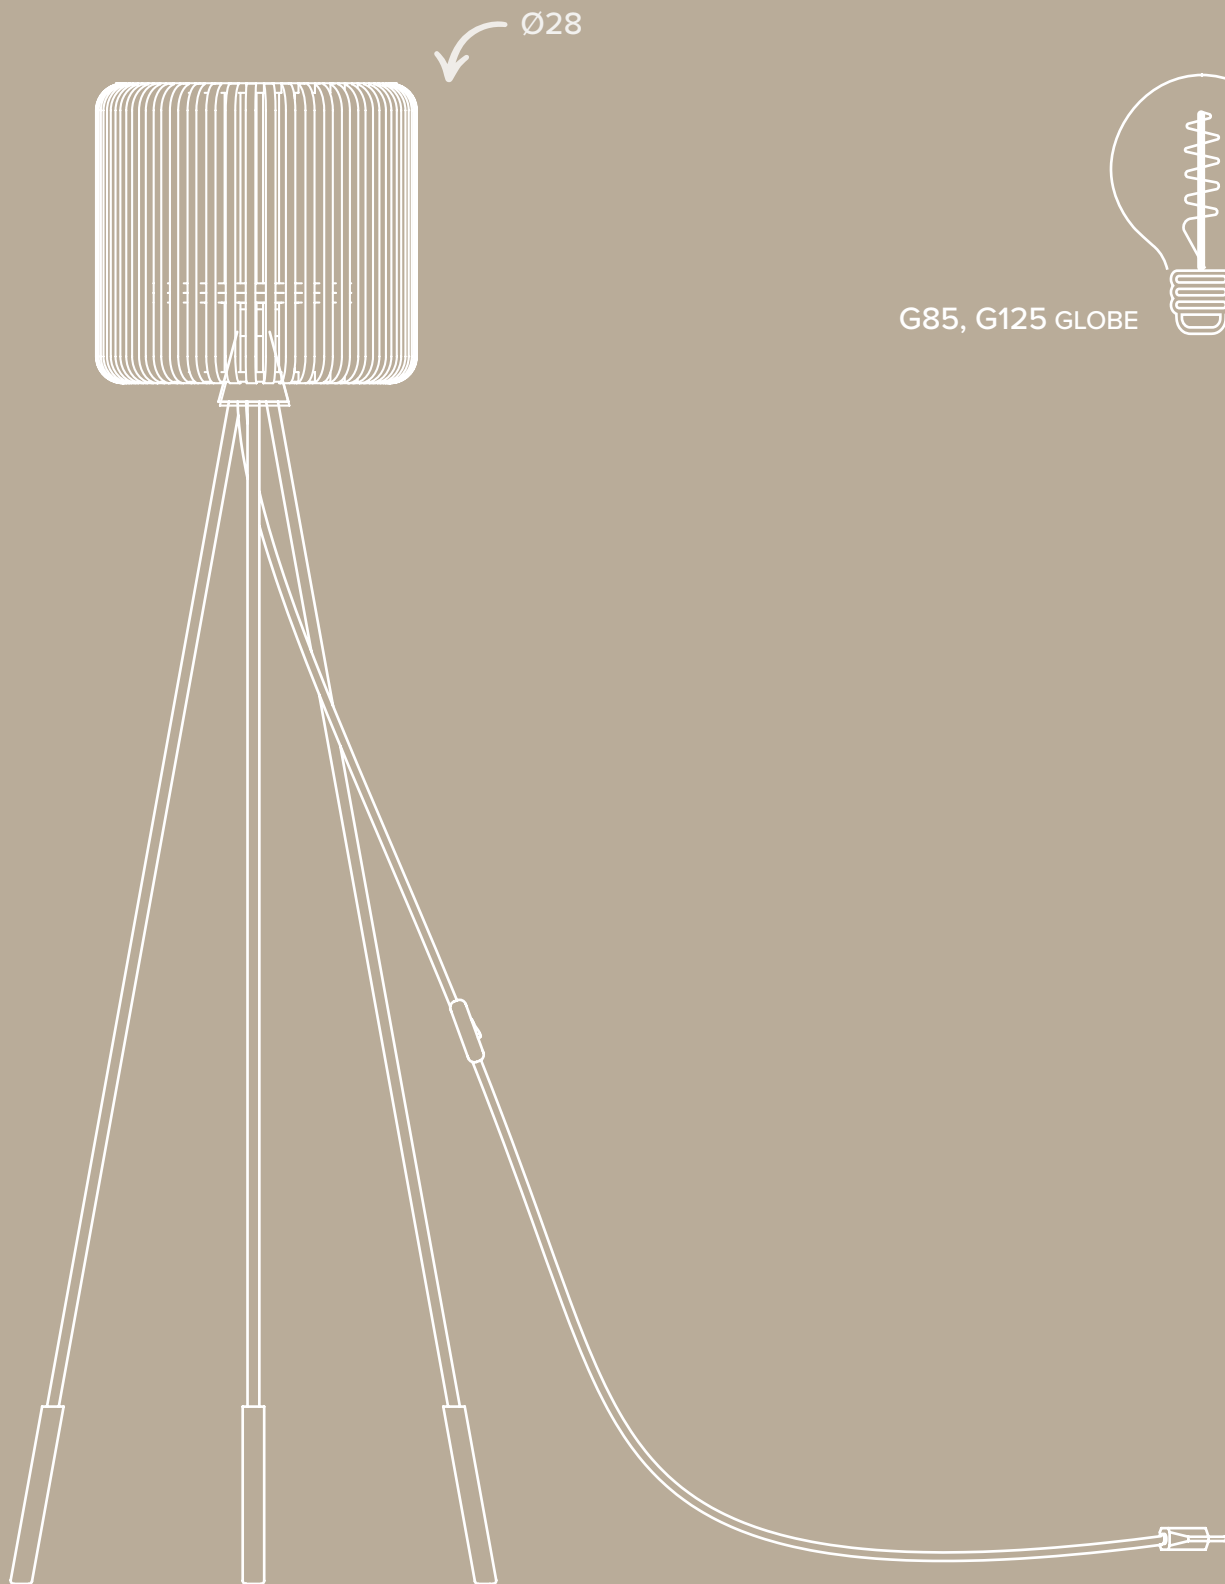

TECHNICAL SPECIFICATIONS STAND

E27

IP20

AC


230V

360°

Input Voltage:	AC120-230V
LED Power STAND28:	4W (400lm) G85
LED Power STAND35:	4W (400lm) G125
LED Power STAND42:	4W (400lm) G125
Efficiency(lm/w):	100lm/w
LED Type:	G85, G125 Globe
Color Rendering Index(CRI):	85 Ra
Dimensions TRIPOT:	Ø50x122cm
Dimensions LAMPSHADE28:	Ø28x28cm
Dimensions LAMPSHADE35:	Ø35x35cm
Dimensions LAMPSHADE42:	Ø42x42cm
Cable length:	200cm

Light bulb dimmable
(dimmable switch contact for more info:)

2200K

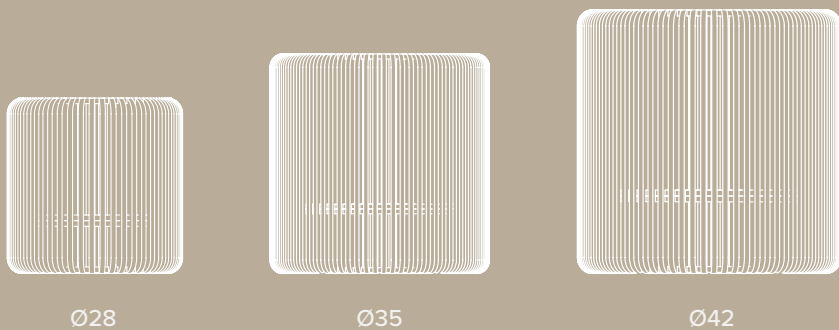

Ø28

Ø35

Ø42

TECHNICAL SPECIFICATIONS PETBOARD

Composition:	100% PET (> 70% recycled PET)
Thickness:	9mm
Density:	210kg/m3
Weight:	1900g/m2 (± 2%)
Number of PET-bottles:	55/m2

PETpanel colors: 33

Fire test EN 13501-1: B-S1, d0 (B: nearly non-combustible S1: low smoke production d0: no droplet formation during fire)

Sound-absorbing surface STAND28:	0,37m2 (± 5%)
Sound-absorbing surface STAND35:	0,57m2 (± 5%)
Sound-absorbing surface STAND42:	0,83m2 (± 5%)

Sound absorption petboard aw/m2:	0,25
Sound absorption petboard NRC/m2:	0,30





DESIGNS TRACKER[®]
LEGERROSTAND28-09-A-B-P1