
LINE

600mm

2400mm

STANDARD: COB LED-strip

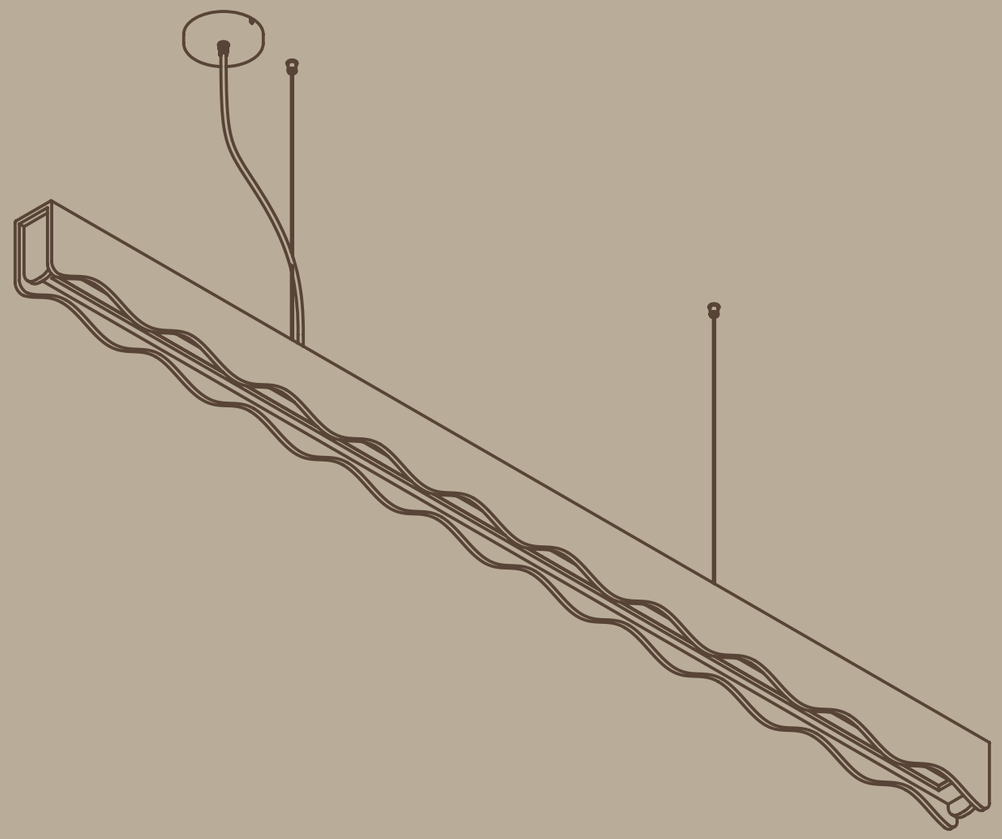

TECHNICAL SPECIFICATIONS LINE

IP20 | AC | 230V | 35° | TRIAC | DALI | 0-10V

Optional dimming:
contact for more info
NOT STANDARD!

Input Voltage:	AC 100V-240V (50-60Hz)
LED Power	28W/1000mm
LED Type:	SMD5050 (LEDstrip)
Efficiency(lm/w):	80lm/w
Color Rendering Index(CRI):	80 Ra
Dimensions LINE	60-240x8x10cm
Cable length:	200cm
Control:	TUYA smart app/Remote

2700K CCT-DIM 6500K

3000K 4000K 6000K

Double LED rail 28W/1000mm

TECHNICAL SPECIFICATIONS PETBOARD

Composition:	100% PET (> 70% recycled PET)
Thickness:	9mm
Density:	210kg/m3
Weight:	1900g/m2 (± 2%)
Number of PET-bottles:	55/m2
PETpanel colors:	47
Fire test EN 13501-1:	B-S1, d0
Sound absorption petboard αw/m2:	0,25
Sound absorption petboard NRC/m2:	0,30

SPECIAL: RGB+CCT

DESIGNS TRACKER

© Designstracker. All rights reserved

DESIGNS TRACKER
© Designstracker. All rights reserved