



# LEGERRO FLOOR/HANG

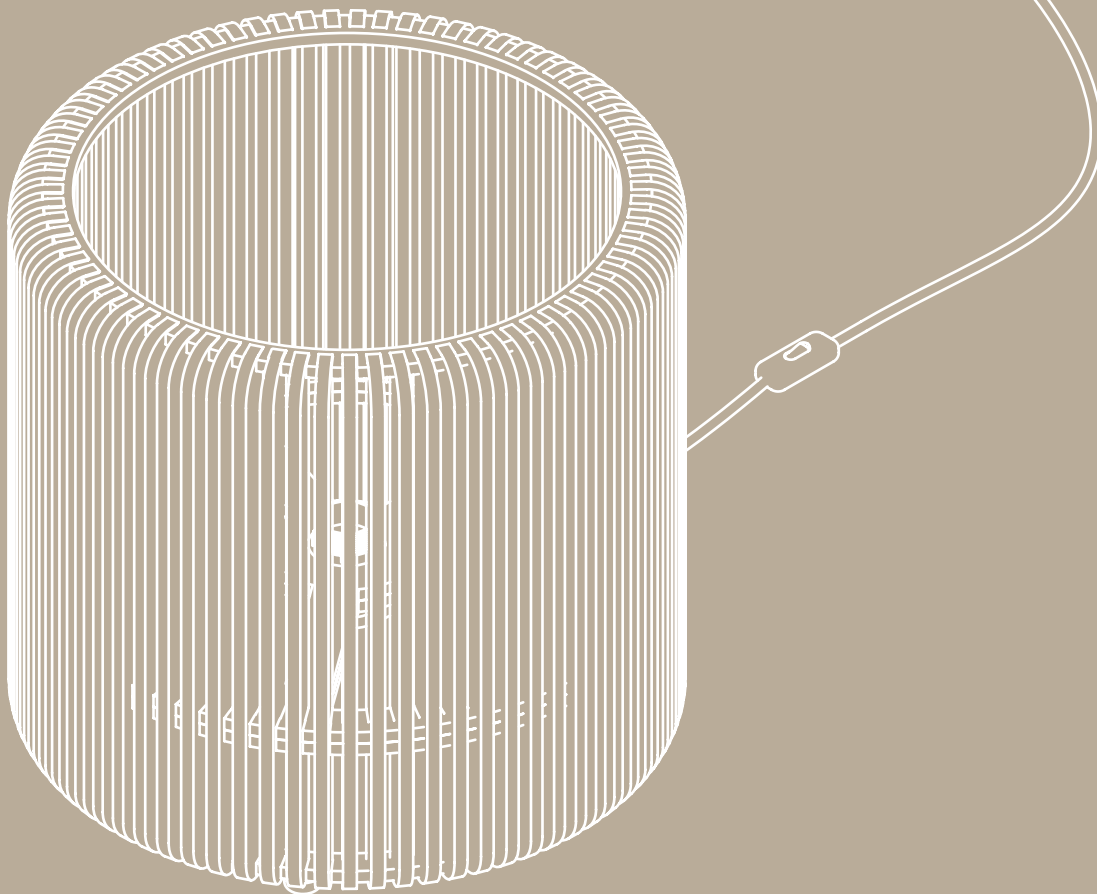

G85, G125, G200, GLOBE

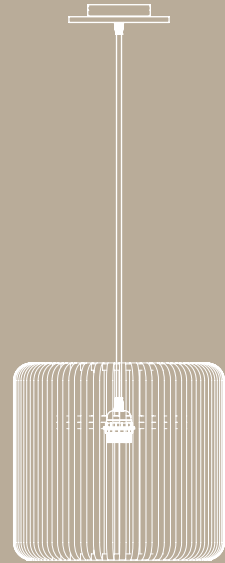

DESIGNS TRACKER<sup>®</sup>

© 2023 Designstracker. All rights reserved



# TECHNICAL SPECIFICATIONS FLOOR/HANG

E27

IP20

AC

230V


360°

Input Voltage:	AC120-230V
LED Power FLOOR/HANG28:	4W (400lm) G85
LED Power FLOOR/HANG35:	4W (400lm) G125
LED Power FLOOR/HANG42:	4W (400lm) G125
LED Power FLOOR/HANG56:	6W (600lm) G200
Efficiency(lm/w):	100lm/w
LED Type:	G85, G125, G200 Globe
Color Rendering Index(CRI):	85 Ra
Dimensions FLOOR/HANG28:	Ø28x28cm
Dimensions FLOOR/HANG35:	Ø35x35cm
Dimensions FLOOR/HANG42:	Ø42x42cm
Dimensions FLOOR/HANG56:	Ø56x56cm
Cable length:	200cm


Light bulb dimmable  
(dimmable switch contact for more info:)




2200K




Ø28



Ø35

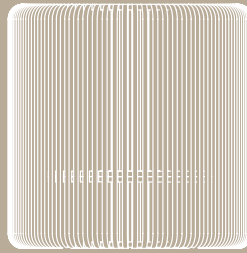

Ø42

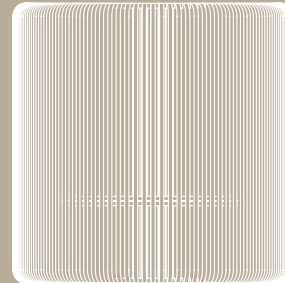

Ø56

# TECHNICAL SPECIFICATIONS PETBOARD

Composition:	100% PET (> 70% recycled PET)
Thickness:	9mm
Density:	210kg/m <sup>3</sup>
Weight:	1900g/m <sup>2</sup> (± 2%)
Number of PET-bottles:	55/m <sup>2</sup>


PETpanel colors: 33

Fire test EN 13501-1: B-S1, d0 (B: nearly non-combustible S1: low smoke production d0: no droplet formation during fire)

Sound-absorbing surface FLOOR28:	0,37m <sup>2</sup> (± 5%)
Sound-absorbing surface FLOOR35:	0,57m <sup>2</sup> (± 5%)
Sound-absorbing surface FLOOR42:	0,83m <sup>2</sup> (± 5%)
Sound-absorbing surface FLOOR56:	1,47m <sup>2</sup> (± 5%)

Sound absorption petboard aw/m <sup>2</sup> :	0,25
Sound absorption petboard NRC/m <sup>2</sup> :	0,30

DESIGNS TRACKER<sup>®</sup>  
VERSION:1



DESIGNS TRACKER<sup>®</sup>  
LEGERRO<sub>FLOOR</sub>-65-G-W



DESIGNS TRACKER<sup>®</sup>  
LEGERRO<sub>FLOOR</sub>-22-G-W

