




LUX ANNULUM

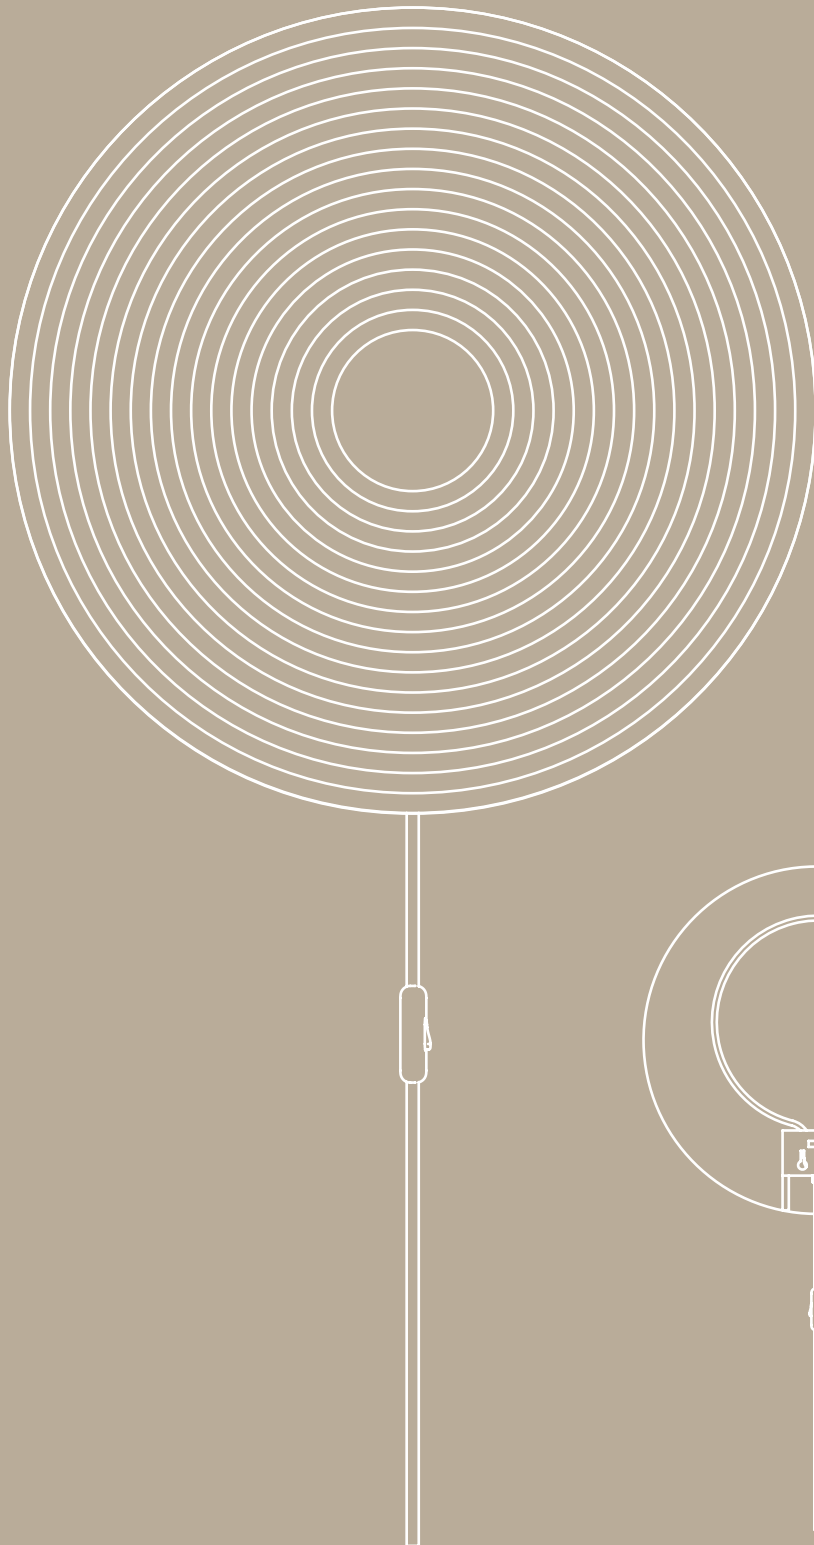

G60, GLOBE



RING 275mm



TECHNICAL SPECIFICATIONS LUX ANNULUM

E27

IP20

AC

230V

120°

Input Voltage:	AC120-230V
LED Power LUX ANNULUM:	4W (400lm)
Efficiency(lm/w):	100lm/w
LED Type:	RING 250mm, G60 GLOBE
Dimmable:	YES possible, NOT standard
Color Rendering Index(CRI):	80 Ra
Dimensions LUX ANNULUM:	Ø50x25cm
Cable length:	200cm


Light bulb dimmable
(dimmable switch contact for more info:)

2200K

TECHNICAL SPECIFICATIONS PETBOARD

Composition:	100% PET (> 70% recycled PET)
Thickness:	9mm
Density:	210kg/m ³
Weight:	1900g/m ² (± 2%)
Number of PET-bottles:	55/m ²
PETpanel colors:	33
Fire test EN 13501-1:	B-S1, d0 (B: nearly non-combustible S1: low smoke production d0: no droplet formation during fire)
Sound-absorbing surface LUX ANNULUM:	0,19m ² (± 5%)
Sound absorption petboard α_w /m ² :	0,25
Sound absorption petboard NRC/m ² :	0,30

DIFFERENT DESIGNS AND DIMENSIONS

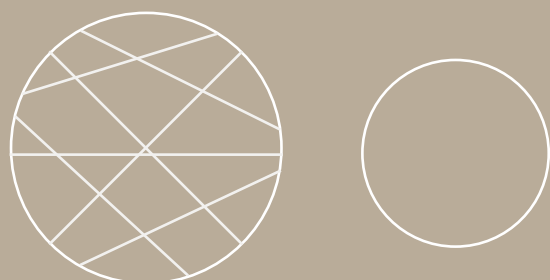



DESIGNS TRACKER[®]
LUXANNULUM-65-A-B